



TRAILER MOUNTED ACCESS PLATFORM



56ft 1in (17.10m) Working height

28ft 6in (8.70m) Working outreach

Telescopic Upper Boom

Greater accuracy when positioning platform

Hydraulic Outriggers

For quick & easy setup

Fully Proportional Hydraulic Controls

Simple, reliable & easy to maintain

Bi-Energy Available

Optimising utilisation







With one of the largest working envelopes in its class the Nifty 170 delivers maximum reach with stability and control. Octagonal boom sections provide strength without compromising on weight and the telescopic upper boom improves accuracy when positioning the platform Hydraulically operated outriggers and controls make setting up and operating quick and easy, especially on uneven surfaces.





The 170's outstanding reach Also available on a self-drivable 2x4 makes it ideal for a wide or 4x4 base, the Nifty 170SD. range of applications.

Fully proportional hydraulic outriggers make setting up and levelling quick and easy even on gradients.



SPECIFICATIONS

Working Height	17.10m	56ft 1in
Platform Height	15.10m	49ft 6in
Working Outreach	8.70m	28ft 6in
Slew	360 [°]	
Width - Travelling	1.60m	5ft 3in
- Working	4.37m	14ft 4in
Height - Overall	2.16m	7ft 1in
Length - Overall	6.20m	20ft 4in
Weight	1,900kg - 2,000kg*	4,180lbs - 4,400lbs*
Platform Rotation**	100 [°]	
Platform Capacity	200kg	4400lbs
Platform Size	1.10m x 0.65m	3ft 8in x 2ft 1in
Control System	Fully Proportional Hydraulic	
Power System	Mains Only	
	Battery Only	
	Gas or Diesel Only	
	Bi-Energy (engine & battery)	
Drive Option	Traction Drive	
* Weights may vary according to specification / power options please confirm before ordering		

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without Option Available on request.


Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.



NIFTYLIFT LTD Fingle Drive Stonebridge Milton Keynes **MK13 0ER** England www.niftylift.com e-mail: info@niftylift.com Tel.: +44 (0) 1908 223456 Fax.: +44 (0) 1908 312733

SAFETY FEATURES

- Pressure Sensitive Outriggers
- Audible and Visible Alarms
- Manual Recovery with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Overrun Brakes with Gas Spring Hand Brake
- **Dual Harness Points**
- CE Marked

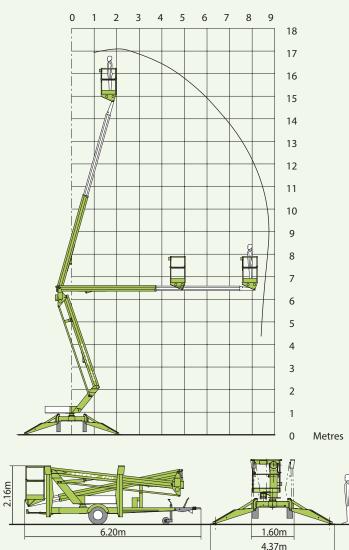

RIEZEBOS

notice. Please confirm exact specification before ordering.